



Step 1: Remove soil and roots over the trunk flare

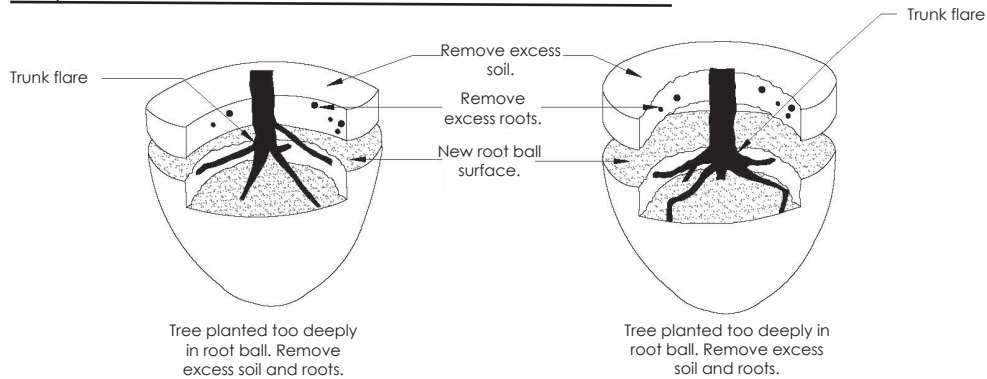

Step 2 - Remove defects

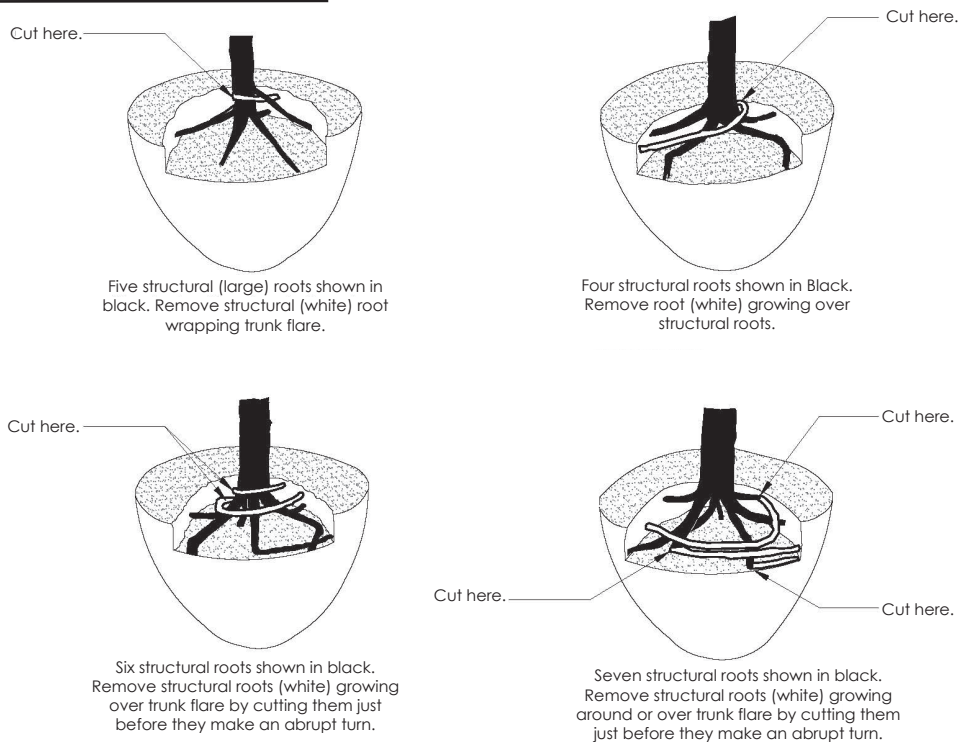

Notes:

1. All trees shown are rejectable unless they undergo recommended correction.
2. First step 1, then step 2. Adjust hole depth to allow for the removal of excess soil and roots over the trunk flare. Trees planted too deep will be rejected.