




PROJECT NO:	801192
DATE:	3-29-2021
REVISIONS	
DATE	DESCRIPTION
2-1-22	FC 01
4-8-2022	FC 03

- FLOOR PLAN KEYNOTES**
 APPLIES TO DRAWINGS A2.1.0
 REPRESENTED BY n
- EXISTING STORAGE RACKS TO REMAIN
 - FLAMMABLE STORAGE CABINET, 43"x18"x65" 45 GALLON CAPACITY WITH SELF CLOSING DOORS MEETING REQUIREMENTS IN NFPA 1, NFPA FLAMMABLE LIQUID CODE 30, OSHA STANDARD, 1910.105, AND FM APPROVED
 - PALLET STORAGE RACKS WITH WIRE SHELVING AND CROSS BARS AS REQUIRED, 95"x49"x100" 14 GA STEEL FRAME, 15 GA STEEL BEAMS, 15,000 LBS CAPACITY, 2 SHELVES MIN. BOLT TO FLOOR, PROVIDE RACK PROTECTORS ON OUTSIDE COLUMNS
 - MOUNT RACK BETWEEN 34"-36" PROVIDE PALLET RACK CROSS BARS @ 24" OC AND PROVIDE 3/4" FIRE RETARDANT TREATED PLYWOOD SECURED TO CROSS BARS ON LOWER SHELF.
 - REMOVE EXISTING DOOR AND HARDWARE, FRAME TO REMAIN. REFER TO DETAIL 1/A2.1.0
 - INFILL EXISTING OPENING. REFER TO DETAIL 2/A2.1.0
 - NOT USED
 - PROVIDE TOP OF WALL DETAIL 3/A2.1.0, ALONG BOTH SIDE OF ENTIRE LENGTH OF WALL
 - REMOVE DOOR AND HARDWARE
 - CUT OPENING INTO EXISTING PRECAST WALL FOR NEW DOOR OPENING. PRIOR TO CUTTING, LOCATE EXISTING WALL REINFORCING AND PROVIDE LAYOUT TO ARCHITECT FOR REVIEW AND FINAL DOOR LOCATION. DO NOT LOCATE DOOR CLOSER THAN 2'-0" TO EDGE OF PANEL.

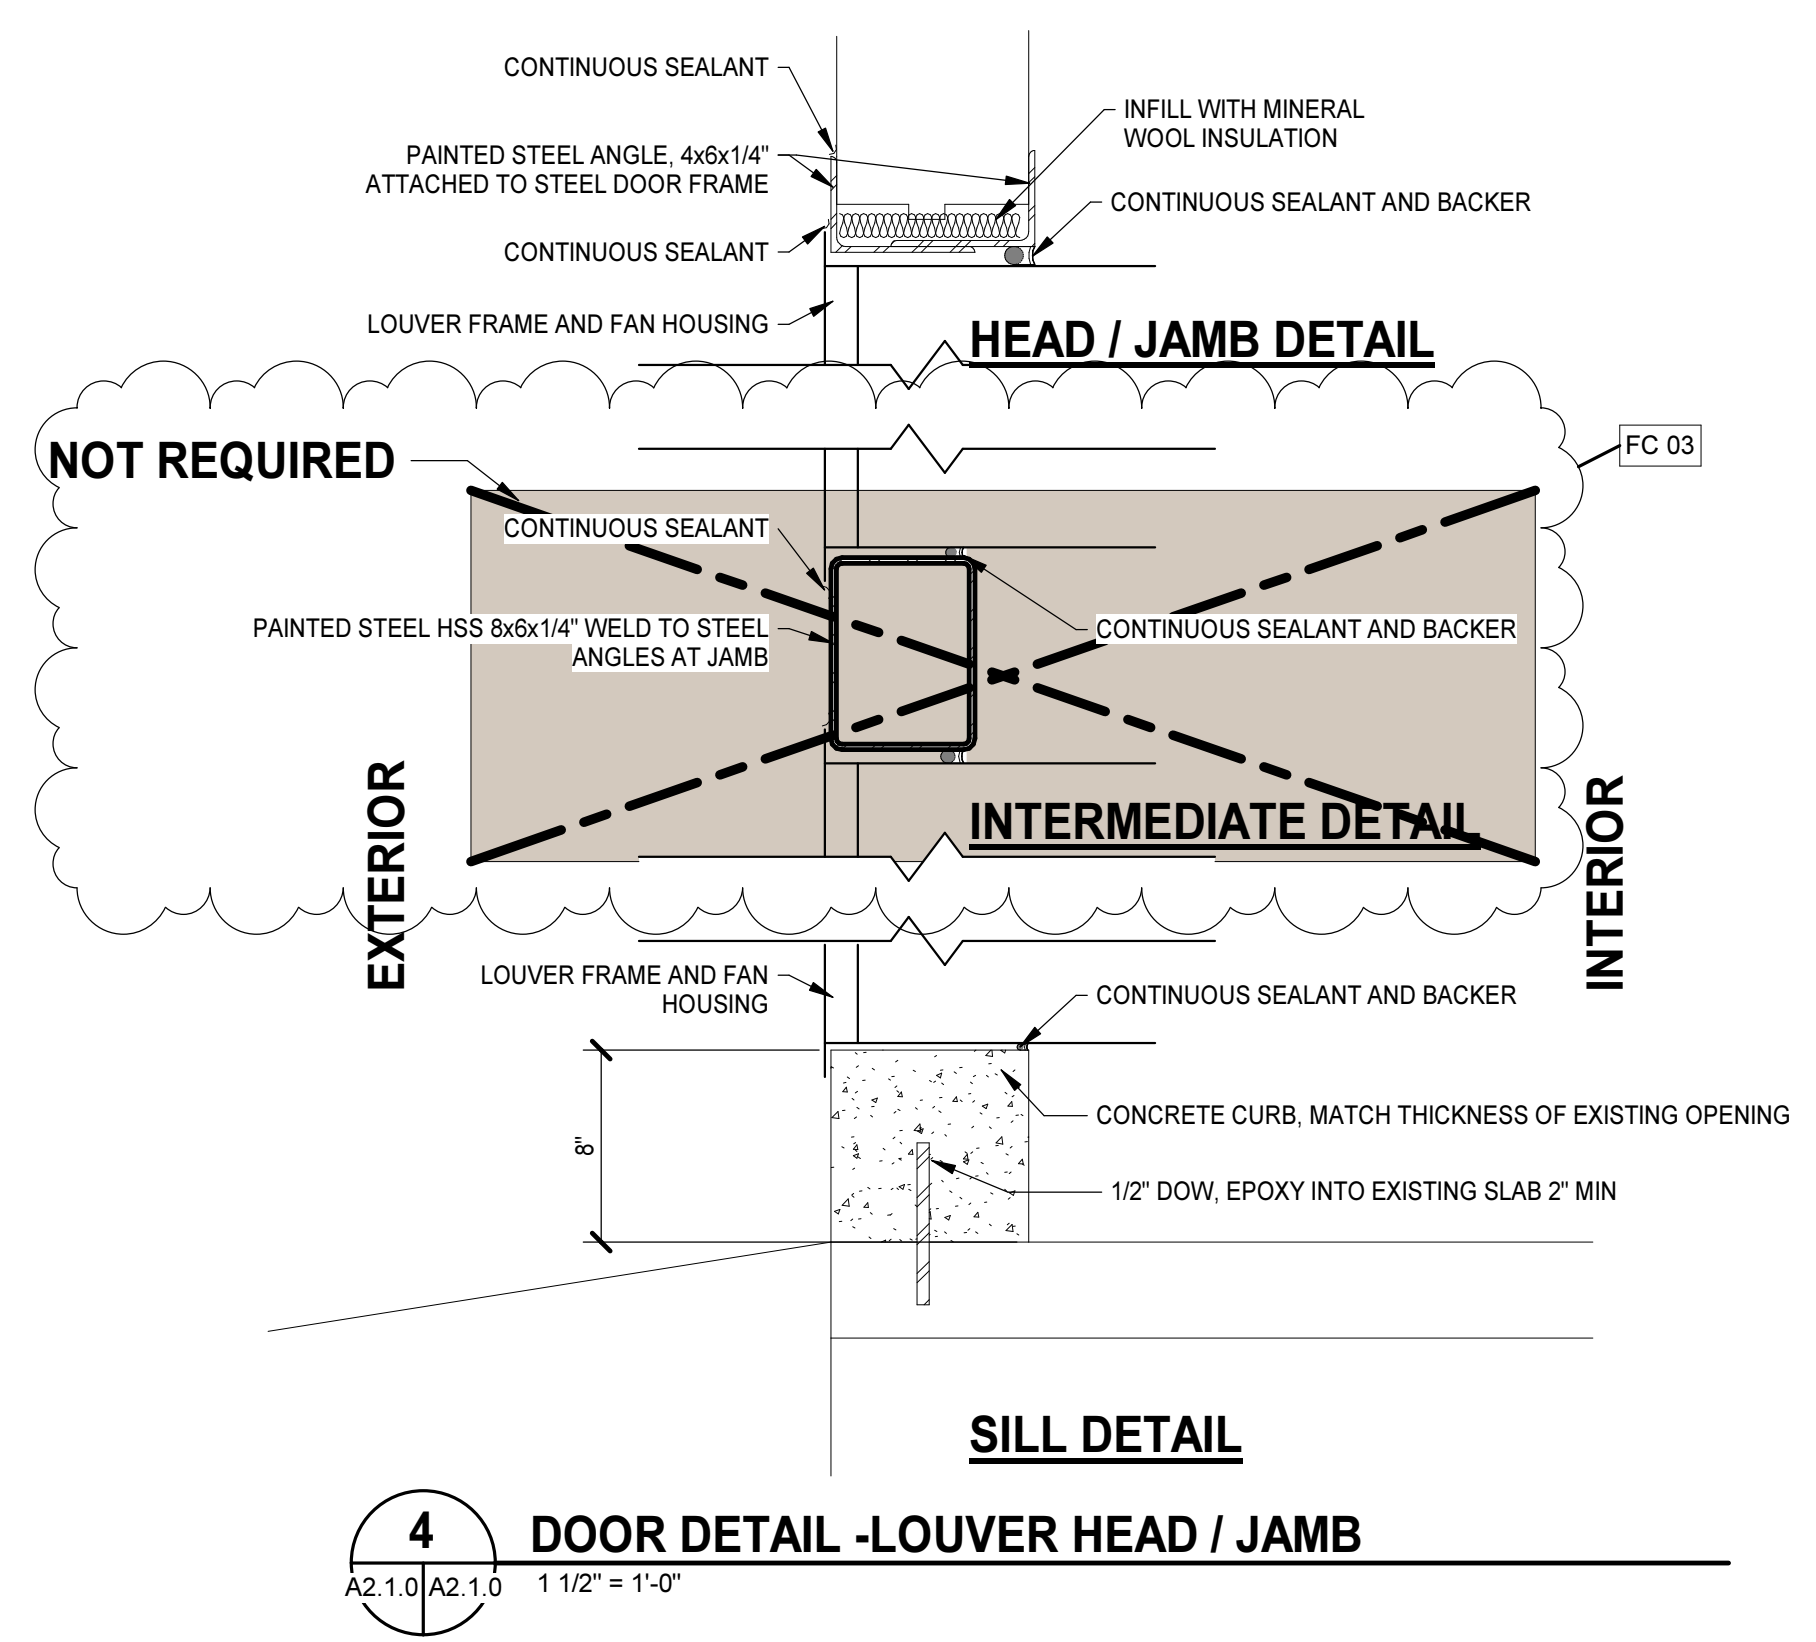


3 TOP OF WALL DETAIL
 A2.1.0/A2.1.0 1" = 1'-0"

2 EXISTING OPENING INFILL
 A2.1.0/A2.1.0 14" = 1'-0"

1 DOOR DETAIL - EXISTING DOOR TO FAN
 A2.1.0/A2.1.0 14" = 1'-0"

4 DOOR DETAIL - LOUVER HEAD / JAMB
 A2.1.0/A2.1.0 1 1/2" = 1'-0"

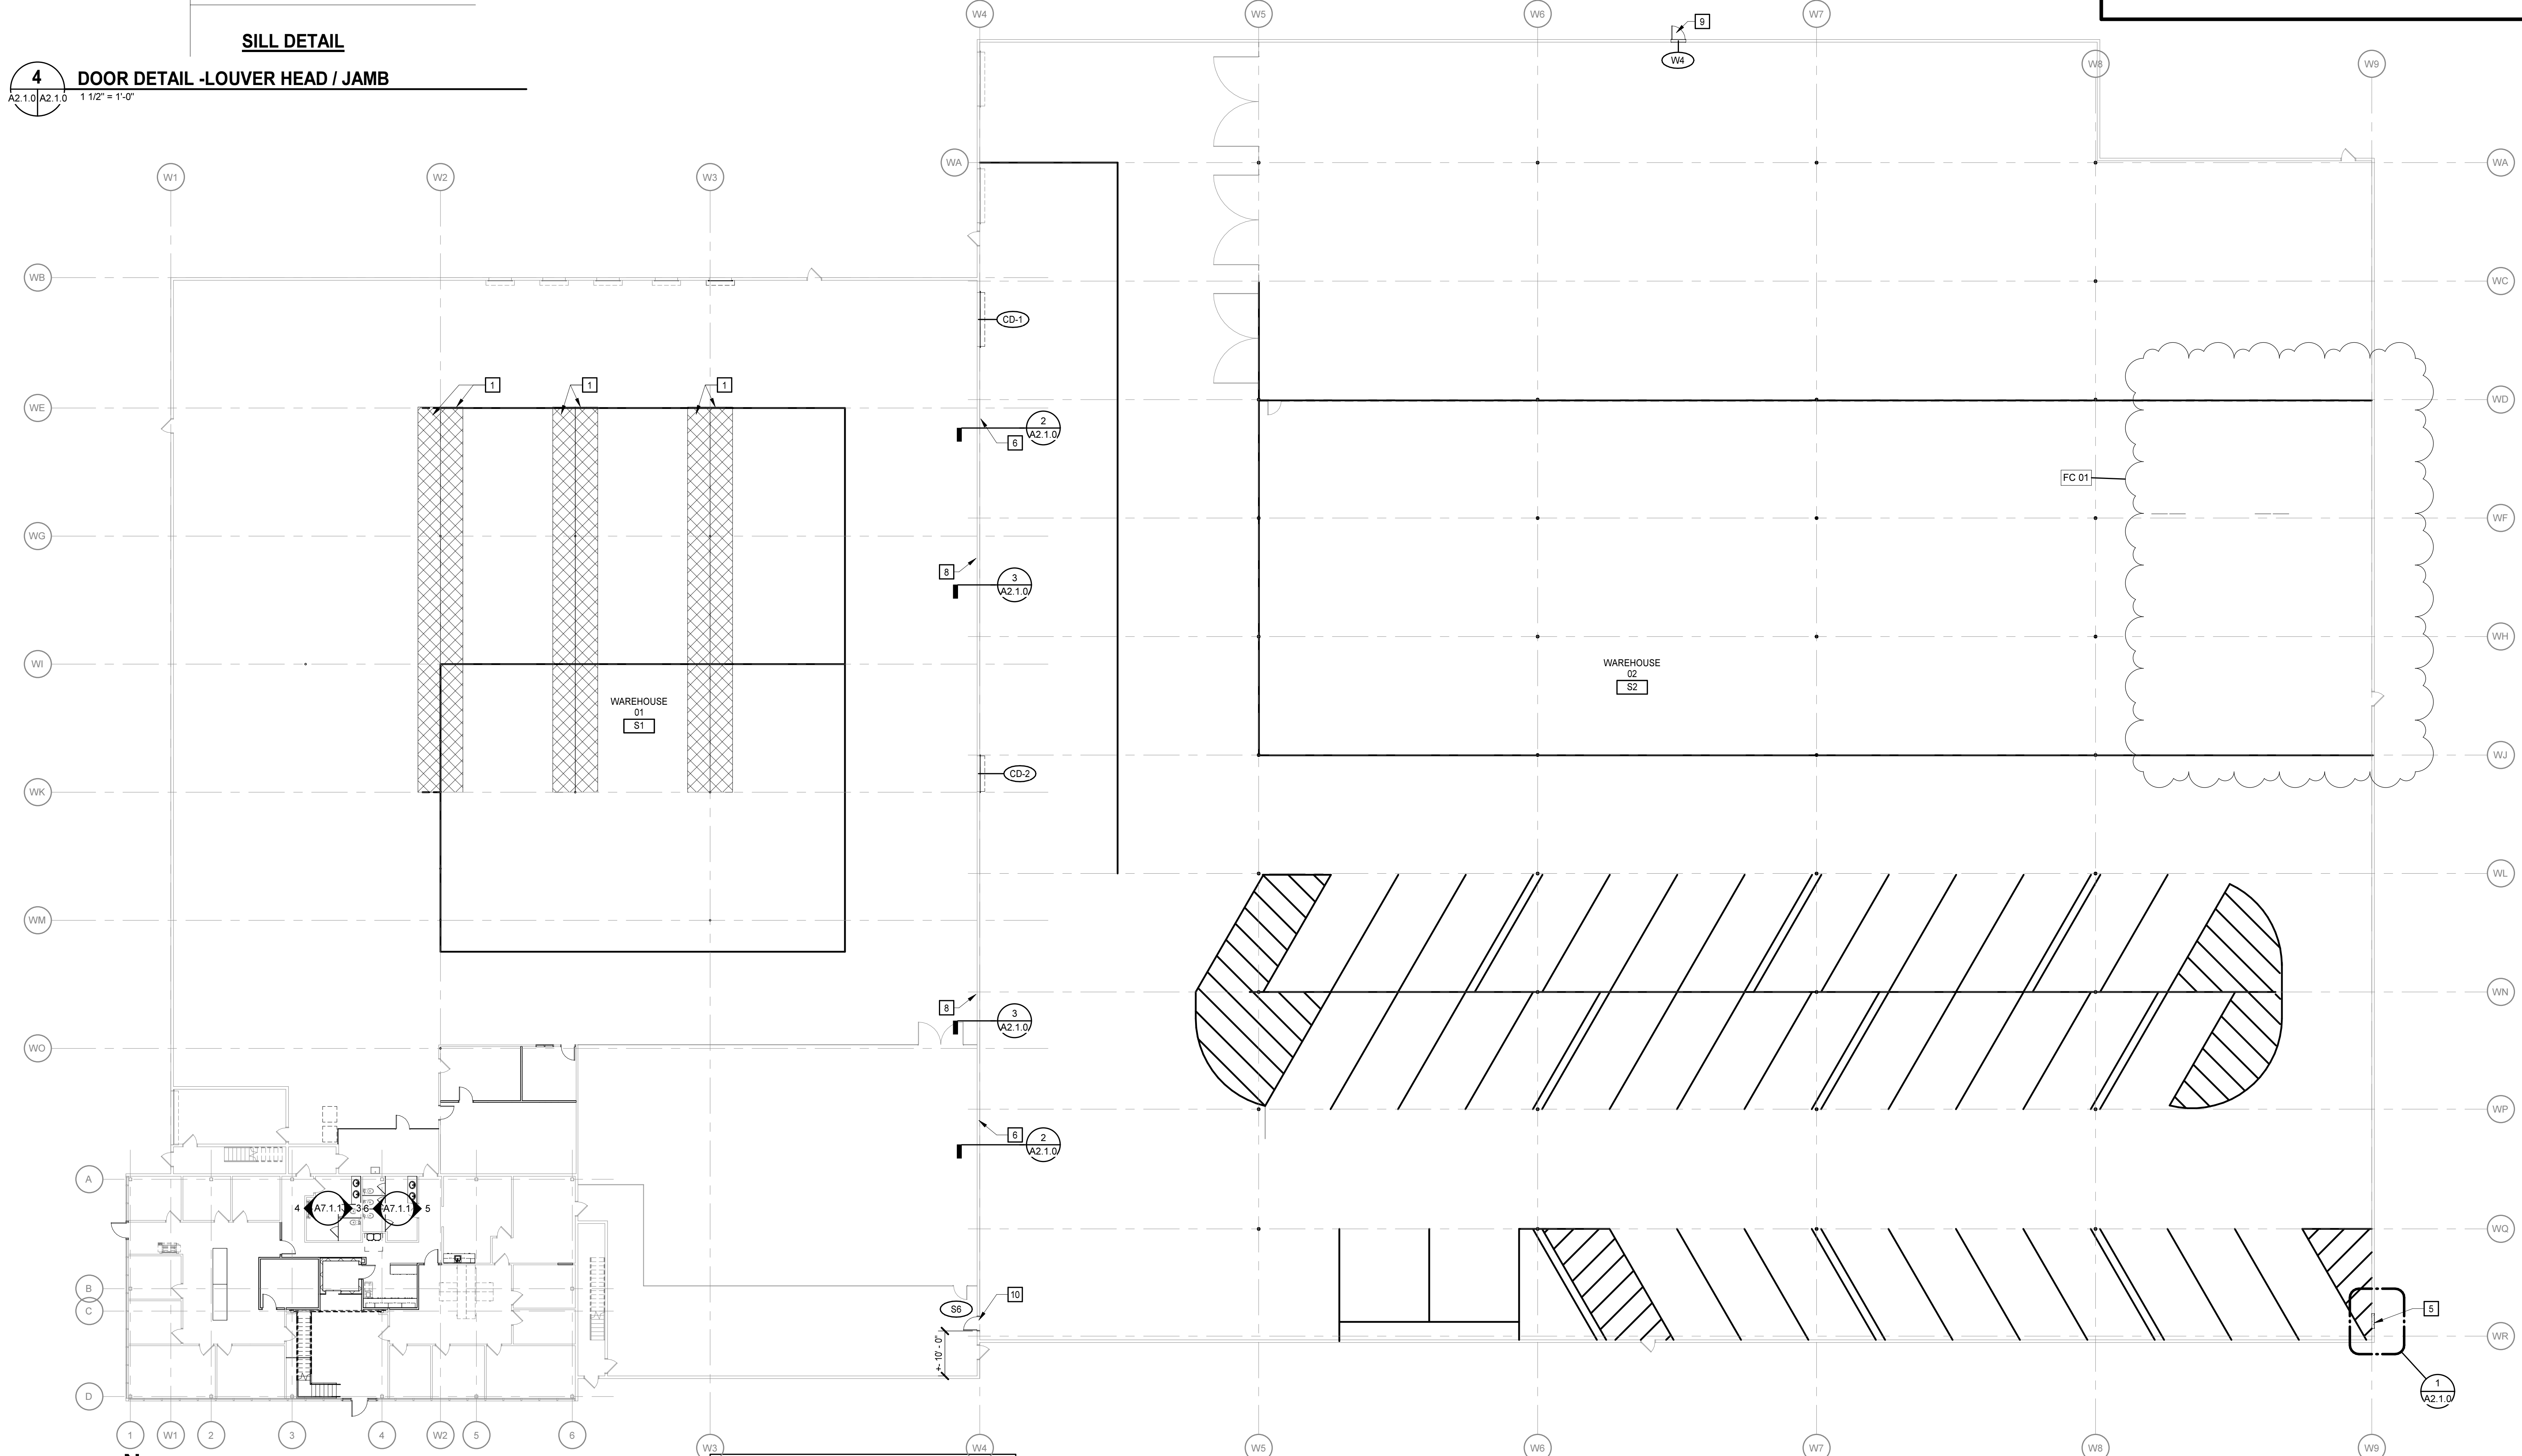

OVERALL FIRST FLOOR PLAN
 1/16" = 1'-0"
 ALL FENCING AND PAVEMENT MARKINGS BY OWNER

ALL WORK NOTED ON THIS SHEET IS PART OF ALTERNATE #1